
Model

FS105D

5-Port 10/100 Mbps Desktop Switch

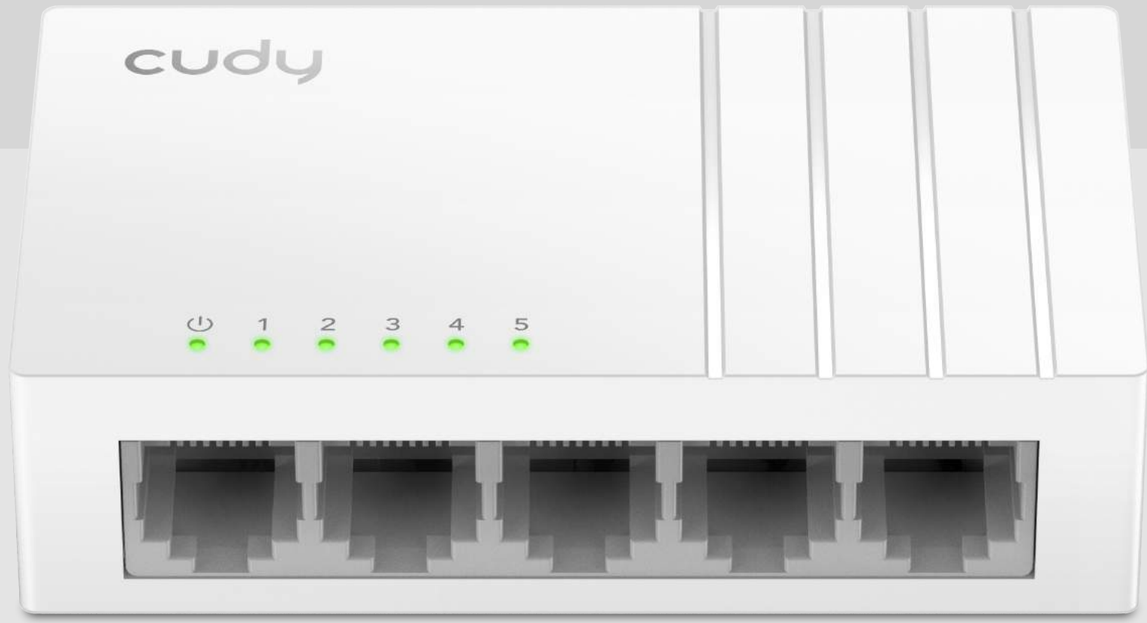

Power Saving

Datasheet

Features

- 5× 10/100 Mbps Ethernet Ports
- Reliable forwarding with 448 Kbit packet buffer
- Super power-efficient with max 0.9W / idle 0.25W rating
- Non-blocking switching architecture
- Desktop and wall-mounting

Specifications

Model	FS105D
Standards	IEEE 802.3i/u
Ethernet	5× 10/100 Mbps Ports (Auto-Negotiation, Auto-MDI/MDIX)
Network Media	10BASE-T: UTP Cat 3 or above cable (≤100 m)
	100BASE-TX: UTP Cat 5 or above cable (≤100 m)
Transfer Method	Store-and-Forward
MAC Address Table	512
Switching Capacity	1 Gbps
Packet Forwarding Rate	0.744 Mbps
Packet Buffer	448 Kbit
Power Saving	Saves power consumption when ports are idle
Power Consumption	Max 0.9W, Idle 0.25W
Power	DC 5 V / 0.55 A
Dimensions (W×D×H)	88×52.5×24 mm (3.46×2.07×0.94 inches)
Environment	Operating Temperature: 0°C~40°C
	Storage Temperature: -40°C~75°C
	Operating Humidity: 0%~100% non-condensing
	Storage humidity: 5%~95% non-condensing
Package Content	Switch, Power Adapter, Installation Guide